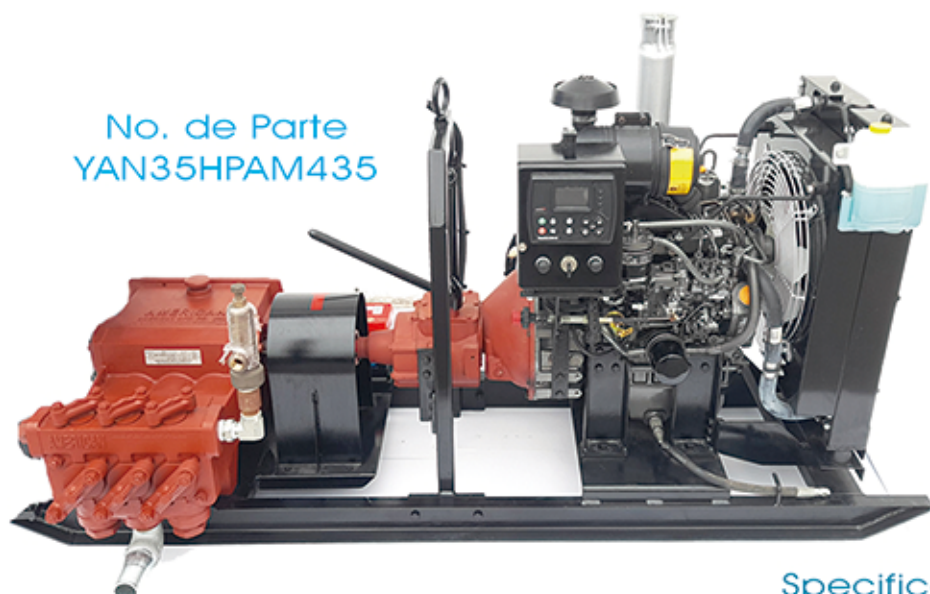


**CORE-BEIL®**

ROCK TOOLS

www.corebeil.com

BOMBA DE SUMINISTRO YAN35HPAM435

No. de Parte
YAN35HPAM435Tanque Opcional
Capacidad 52 Litros

Specifications for YANMAR 3TNV88-BDSA

Standard Equipment

- Jaw Coupling with Safety Guard.
- Adjustable Pressure Relief Valve.
- Battery Rack.
- Battery Cables.
- 530 CCA Battery.
- 12 V Electric Start.
- 12 V Electric Start.
- Welded Skid Mount Steel Base Frame with Handles and Coped Ends for Easy Transport.
- Single Point Lifting Ball.

Weight and Dimensions:

Length: 1651 mm (68 po)
 Width: 838 mm (33 po); Frame only (24 po)
 Height: 838 mm (33 po)
 Weight: 660 kg (1020 lbs) approx.

Safety Pressure Relief Valve: Hidroseal 1400 series

Working Pressure / Size: 1000 psi / 1" NPT
 Casting: Cast Iron
 Internal Seat: Stainless Steel
 Rated Flow at 1050 psi (5% overpressure): 179 Gal / Min

DISTRIBUIDOR AUTORIZADO:

Diesel Engine Model :

YANMAR 3TNV88-BDSA

Type:
 No. of Cylinders (Motor):
 Fuel:
 Combustion Type:
 Aspiration:
 Fuel Consumption L/Hr:
 Capacity:
 Maximo Torque:
 Cooling System:
 Engine Speed RPM:
 Net Intermittent Hp (KW):
 Starting System

4 - Stroke
 3
 Diesel
 Direct Injection
 Natural Aspiration
 8.39
 79.5 @1800 RPM
 Radiator
 3000 RPM
 36 (26.9) KW
 12 V Electric

Water Pump Model :

AMW1122BCD

No. of Pistons (Pump):
 Stroke:
 Internal Gear Reduction Ratio:
 Crankcase Material:
 Max. Rated RPM / GPM:
 Max. Rated HP:
 Max Output Pressure:
 Actual Max. RPM / GPM:

3 Pistons
 2 3/4"
 3.6 : 1
 Cast Iron
 890 RPM / 52 GPM
 1000 psi
 600 RPM / 33 GPM

Transmission Gearbox Model:

Newage 40M43FS

Reduction Ratio:
 Max Capacity Torque-RPM:
 Number of Speed:

3.07:1
 60 Lbs / Ft - 3250 RPM
 4 Speed

